GIUNTI s.p.a.
Via Giacomo Giunti 3 - Fraz. Niccone
06019 UMBERTIDE (PG) - Italia info@giuntispa.it

TORNADO F

DOTAZIONE STANDARD

- Telaio, carrello porta irrigatore ed accessori zincati a caldo.
- Rullo verniciato.
- Turbina flangiata sul riduttore, controllo velocità con compensatore..
- Riduttore mono-marcia con disinnesto automatico.
- Dispositivo per riavvolgimento per raccolta fuori sagoma (esclusa F1).
- Regolatore e compensatore di velocità (esclusa F1).
- Sistema guida-tubo.
- Carrello porta irrigatore su 2 ruote con carreggiata regolabile e caricamento
- automatico.
- Piedini laterali di stazionamento.
- Irrigatore a settori con set di boccagli:
  - tubo diam. 40: K1
  - tubo diam. 50: Ambo
  - tubo diam. 63: Hidra
- Tubo alimentazione 3 mt con raccordo sferico femmina lato linea.
- Ingresso acqua lato turbina.

STANDARD EQUIPMENT

- Galvanized chassis, sprinkler trolley and accessories.
- Reel painted.
- Flanged turbine on the gearbox, speed control and compensator.
- Gearbox single speed with automatic drive disengagement.
- Device for rewinding through handle or PTO (except on F1) and safety for rewinding outside of the drum
- (F1 excluded).
- Hose-guide screwbar.
- Two wheels sprinkler trolley with adjustable track and automatic trolley lift.
- Lateral staker legs.
- Sectoring sprinkler with set of nozzles:
  - for PE hose diam. 40: K1
  - for PE hose diam. 50: Ambo
  - for PE hose diam. 63: Hidra
- Supply hose 3 mt. with female ball joint on line side.
- Water inlet from turbine side.

MODELLI - MODELS	Irrigatore - Sprinkler
F1 40/125	K1
F2 50/100	*Ambo*
F2 50/150	*Ambo*
F2 63/100	*Senior*

GIUNTI s.p.a.
Via Giacomo Giunti 3 - Fraz. Niccone
06019 UMBERTIDE (PG) - Italia info@giuntispa.it

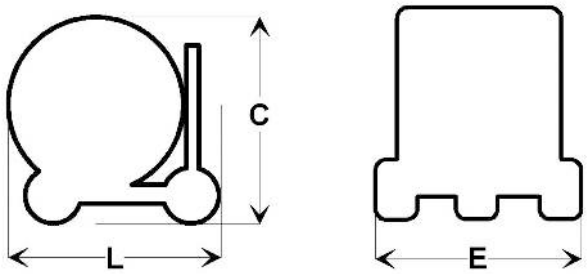

DIMENSIONI INDICATIVE (mm) / INDICATIVE DIMENSIONS (mt)

	C	E	L	Kg. (approx.)
F1	1,250	1,100	1,350	220
F2	1,400	1,300	1,900	450